


CALORFLEX

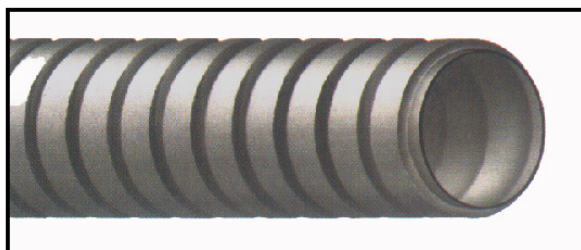

- PRIMJENA:** usis i tlak tople vode - naročito se koristi za ispuh brodskih motora (mješavina povišene temperature ulja, nafte, morske vode)
- UNUTARNJI SLOJ:** glatka sintetska EPDM guma crne boje otporna na toplinu
- OJAČANJE:** tekstilna mreža i čelična spirala
- VANJSKI SLOJ:** spiralno "izbrazdana" sintetska guma otporna na habanje, more i atmosferske utjecaje
- TEMPERATURA:** -40 +120 °C

Promjer (mm)	Radni tlak (bar)	Rasprsk. tlak (bar)	Težina (kg/m)	Pol. sav. (mm)	Kolut (m)	Montaža	
						Obujmice	Stezaljke
20 x 28	5	15	0.52	70	40	18 26 - 28 Inox	20 – 29 Fe/Zn
25 x 33	5	15	0.58	85	40	20 32 - 35 Inox	32 – 40 Fe/Zn
28 x 36	5	15	0.64	95	40	20 32 - 35 Inox	32 – 40 Fe/Zn
30 x 38	5	15	0.68	100	40	20 36 - 39 Inox	32 – 40 Fe/Zn
32 x 40	5	15	0.76	105	40	20 40 - 43 Inox	39 – 49 Fe/Zn
35 x 45	5	15	0.84	115	40	20 40 - 43 Inox	39 – 49 Fe/Zn
38 x 48	5	15	0.95	130	40	22 44 - 47 Inox	39 – 49 Fe/Zn
40 x 50	5	15	1.00	135	40	22 48 - 51 Inox	39 – 49 Fe/Zn
45 x 55	5	15	1.20	150	40	22 52 - 55 Inox	48 – 60 Fe/Zn
51 x 61	5	15	1.30	165	40	22 56 - 59 Inox	48 – 60 Fe/Zn
55 x 65	5	15	1.50	180	40	22 64 - 67 Inox	53 – 68 Fe/Zn
60 x 70	5	15	1.70	200	40	23 68 - 73 Inox	60 – 76 Fe/Zn
65 x 75	5	15	1.35	315	40	23 74 - 79 Inox	60 – 76 Fe/Zn
70 x 79	5	15	1.45	340	40	23 74 - 79 Inox	77 – 94 Fe/Zn
75 x 86	5	15	1.62	390	40	23 86 - 91 Inox	77 – 94 Fe/Zn
80 x 90	5	15	1.67	400	40	23 86 - 91 Inox	77 – 94 Fe/Zn
90 x 100	5	15	1.87	450	40	23 98 - 103 Inox	94 – 115 Fe/Zn
100 x 110	5	15	2.32	490	40	23 104 - 112 Inox	94 – 115 Fe/Zn
125 x 135	5	15	2.83	625	40	23 131 - 139 Inox	115 – 145 Fe/Zn

Napomena: Cijevi CALORFLEX G-SD ovih i drugih unutarnjih promjera imaju DNV certifikat.