


## CIJEVI KVB INOX

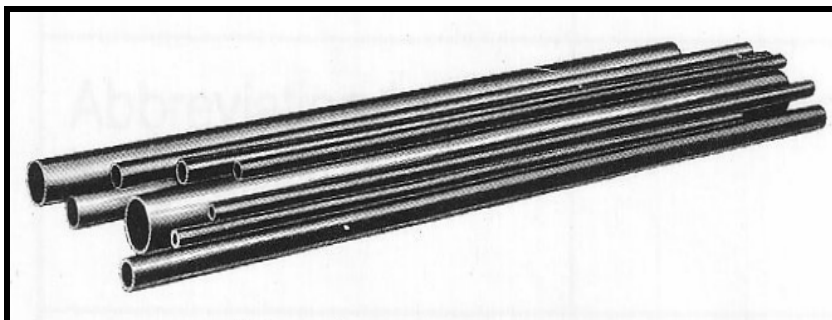

**PRIMJENA:**

krute visokotlačne bešavne cijevi za hidrauliku

**MATERIJAL CIJEVI:**

čelik AISI 316L

**TEMPERATURA:**

-60 +200°

Promjer (mm)	Toleranca (mm)	Debljina (mm)	Tlak statički (bar)	Težina (kg/m)	Dužina (m)
4	± 0.10	0.5	326	0.048	3 - 6
		1.0	544	0.076	3 - 6
6	± 0.10	1.0	406	0.125	3 - 6
		1.5	572	0.169	3 - 6
		2.0	721	0.200	3 - 6
8	± 0.10	1.0	347	0.225	3 - 6
		1.5	449	0.244	3 - 6
		2.0	572	0.301	3 - 6
		2.5	686	0.344	3 - 6
10	± 0.10	1.0	294	0.225	3 - 6
		1.5	389	0.319	3 - 6
		2.0	498	0.401	3 - 6
		2.5	601	0.469	3 - 6
		3.0	694	0.526	3 - 6
12	± 0.08	1.0	245	0.275	3 - 6
		1.5	368	0.394	3 - 6
		2.0	426	0.500	3 - 6
		2.5	516	0.595	3 - 6
		3.0	601	0.676	3 - 6
		3.5	679	0.745	3 - 6
14	± 0.08	1.5	315	0.469	3 - 6
		2.0	420	0.601	3 - 6
		2.5	452	0.720	3 - 6
		3.0	529	0.826	3 - 6
		3.5	601	0.920	3 - 6
15	± 0.08	1.5	294	0.507	3 - 6
		2.0	392	0.651	3 - 6
		3.0	498	0.902	3 - 6
16	± 0.08	2.0	368	0.702	3 - 6
		2.5	402	0.845	3 - 6
		3.0	471	0.977	3 - 6

18	$\pm 0.08$	1.5	245	0.619	3 - 6
		2.0	326	0.801	3 - 6
		2.5	409	0.971	3 - 6
		3.0	426	1.128	3 - 6
20	$\pm 0.08$	2.5	368	1.095	3 - 6
		3.0	389	1.277	3 - 6
		3.5	444	1.446	3 - 6
		4.0	498	1.602	3 - 6
22	$\pm 0.08$	2.0	267	1.001	3 - 6
		2.5	334	1.220	3 - 6
		3.0	401	1.427	3 - 6
25	$\pm 0.08$	2.0	236	1.151	3 - 6
		2.5	294	1.408	3 - 6
		3.0	352	1.653	3 - 6
		4.0	411	2.104	3 - 6
		4.5	456	2.310	3 - 6
28	$\pm 0.08$	2.0	210	1.301	3 - 6
		2.5	263	1.596	3 - 6
		3.0	315	1.878	3 - 6
30	$\pm 0.08$	2.5	245	1.721	3 - 6
		3.0	294	2.028	3 - 6
		4.0	392	2.604	3 - 6
35	$\pm 0.15$	2.0	168	2.222	3 - 6
		2.5	210	2.034	3 - 6
		3.0	252	2.403	3 - 6
		4.0	336	3.104	3 - 6
38	$\pm 0.15$	4.0	310	3.405	3 - 6
		5.0	387	4.131	3 - 6
42	$\pm 0.20$	3.0	210	2.929	3 - 6
		4.0	280	3.806	3 - 6