



# SPRAY

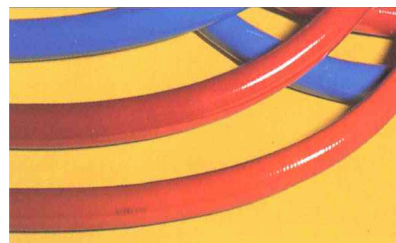

**PRIMJENA** tlak sredstava za zaštitu bilja, vode, zraka  
**UNUTARNJI SLOJ:** plastificirani PVC crne boje  
**OJAČANJE:** poliesterska mreža  
**VANJSKI SLOJ:** plastificirani PVC:  
 narandžaste boje (25 i 50 bara)  
 plavo - crne boje (50, 80 i 100 bara)  
**TEMPERATURA:** -10 +60 °C

Promjer (mm)	Radni tlak (bar)	Rasprs. tlak (bar)	Težina (kg/m)	Kolut (m)	Montaža
					Čahure
8 x 13	25	75	0.115	100	R6/1TE NP 8 *
8 x 14	50	150	0.145	100	R6/1TE NP 8 *
8 x 15	80	240	0.177	100	1SN/2SN NP 8 *
8 x 16	100	300	0.211	100	1SN/2SN NP 8 *
10 x 15	25	75	0.137	100	R6/1TE NP 10 *
10 x 16	50	150	0.165	100	R6/1TE NP 10 *
10 x 18	80	240	0.246	100	1SN/2SN NP 10 *
10 x 19	100	300	0.286	100	1SN/2SN NP 10 *
13 x 19	25	60	0.212	100	R6/1TE NP 13 *
13 x 21	50	150	0.300	100	1SN/2SN NP 13 *
13 x 21	80	240	0.270	100	1SN/2SN NP 13 *
13 x 23	100	300	0.396	100	1SN/2SN NP 13 *
16 x 23	25	75	0.293	50	R6/1TE NP 16 *
16 x 24	40	110	0.330	50	1SN/2SN NP 16 *
19 x 26	25	75	0.347	50	R6/1TE NP 19 *
19 x 28	40	110	0.435	50	1SN/2SN NP 19 *
25 x 34	25	75	0.583	50	R6/1TE NP 25 *
25 x 35	40	110	0.620	50	PTFE IC NP 25 *

\* **Napomena:** Standardne čahure R6/1TE, 1SN/2N i PTFE IC se za ove cijevi doraduju na taj način da im se "zaglađuju" unutarnji zubi